

Odor Control Master Planning using Integrated Approaches

Bart Kraakman¹⁾ and Jay Witherspoon²⁾

¹⁾ CH2M, Portland, OR, USA

²⁾ CH2M, San Francisco, CA, USA

ABSTRACT

The cost for odor control for the collection and treatment of municipal and industrial wastewaters has increased over recent decades. The implementation costs for odor control at a water recovery facility (WRF), typically only a few percent of the facility's total build cost 20 years ago, is now sometimes close to 10% or more. The increase of these cost is driven by several relatively recent changes. Firstly, tighter controls of the waste, including metal waste which previously largely precipitated with odorous compounds. Secondly, water restrictions and innovations in water saving devices has resulted in an increase in the pollutant concentration in the sewer leading to increased septicity when entering the WRFs. Thirdly, there is a growing trend towards more centralized WRFs in many large cities, especially with the amalgamation of water authorities into larger utilities. In addition, there is often new community growth near the facilities. At the same time, many of these water utilities are seeing cost reduction demands driven by this same community to keep rates low.

Odor assessment tools, in the meanwhile, have been developed and/or dramatically improved over the last decade. Among them are mathematical models to predict the formation and dispersion of odors, odor characterization methodologies and odor field measurement equipment as well as odor control design and odor management decision roadmaps. All these tools are now available to be used for Odor Control Master Planning as well as to be used for communication means such as public outreach, community meetings and obtaining internal and external stakeholder support. They can foster better communication and understanding between both the facility, stakeholders and the community regarding conducting odor impact assessments and the impacts of proposed odor control measures to reduce existing odor levels experienced by the surrounding community.

This paper presents the Odor Control Master Planning Tool Set developed over the years by CH2M that has been used for planning and management purposes in selecting proper odor control criteria and prioritizing efforts tailored for the facility's individual funding abilities or to meet a site-specific community demand. Many innovative integrated odor control approaches are presented that have been used to meet a set community-based odor criteria while minimizing the costs. The Tool Set can be used to balance O&M needs, funding, capital expenditures, and other needs to develop a comprehensive control program that is a "win" for both the community and the facility. The paper focusses on the water industry, but the Tool Set incorporates several activities and resources applicable to any other industry.

KEY WORDS

Odors, odor impact assessment, odor control, odor control master planning, odor complaints, community outreach.

INTRODUCTION

Owners and operators of industrial facilities such as wastewater treatment plants, including wastewater collection systems, are being faced with an increasing number of odor complaints and greater pressures to reduce offsite odor impacts. The main contributing factors for this are:

- Encroaching development of residential areas on existing WRFs and/or pump stations;
- Heavy metals largely being removed from the sewage due to tighter controls of the waste and consequently an increase in the formation of odorous compounds in the sewer;
- Expansions of the WRF and collection systems, which resulted in longer retention times in sewage networks;
- Water restrictions and innovations in water saving devices has resulted in an increase in the concentration of pollutants in the sewer leading to increased septicity.
- A more vocal and well-educated community concerned about loss of enjoyment in their homes and backyards and devaluation of their property;
- More stringent regulatory enforcement and regulations;

At the same time, tighter funding controls and greater accountability for spending and budgetary constraints, making justification of capital works and increased operational budgets much more difficult.

To satisfy these competing drivers of greater community and regulatory expectations with financial issues, CH2M, with the help of several owners of large and small facilities, developed and employed Odor Control Master Planning Tools using often integrated approaches. An integrated approach looks at complex systems as a whole and sees if the individual components fulfill the main objective in a manner which result in integration of many different functions for collective optimum performance at minimum cost to the objective in a sustainable manner.

The Odor Control Master Planning Tool Set is successfully used over the years to evaluate the issues and obtain endorsement from all stakeholders for a mutually acceptable path forward. They can help the public to understand the need for reasonable reduction targets and, equally as important, the level of expenditure of time and money necessary to achieve their requirements. Combined with WRF operators' experience, professional understanding of WRF operational issues, and understanding of cost effective treatment solutions, the tools have shown to effectively manage odor problems for facility owners and operators. This systematic evaluation and prioritization of control solutions has helped focus attention to areas that achieve the best, immediate, short-term, and long-term solutions.

THE ODOR CONTROL MASTER PLANNING APPROACH

The Odor Control Master Planning Tool Set incorporates a number of activities and resources that can be applied to any odor control project. **Figure 1** shows the main phase of the Tool Set, which include:

1. Chartering the Project. Team chartering is a structured process that establishes the goals, objectives, constraints, and critical success factors. The chartering process reviews project plans and verifies objectives, develops collaboration and decision-making, and results in agreement on approach. Involving all stakeholders in the decision-making process and agreeing on identifiable and quantifiable goals allows activities to occur with stakeholder support and more importantly their understanding.

For example, sometimes specific odor management regulations are absent, other than general air quality requirements to prevent facilities from negatively affecting public health by the release of odorous gases. In the absence of specific regulatory-driven odor limits, the facility operator, local residents, and other stakeholders have to define the acceptable impact limits.

2. Assessing Current Situation. This step involves assessing the current situation and identifying and filling knowledge gaps. The information required includes odor emissions date, potential odor emissions from the collection system, and impact of influent wastewater on odor emissions from the WRF, and the actual and predicted extent of odor impact on areas surrounding the WRF. Specific tools used in this phase can include assessments, mathematical models, methodologies, or equivalent, to provide odor emission estimates. These tools are discussed in greater detail below.
3. Developing Odor Inventory. In addition, measuring odor emissions is another critical aspect and can be done using laboratory and field-based olfactometry, and chemical characterization of odorous compounds. Odor dispersion modeling is conducted to assess the estimated offsite odor impacts. This phase also includes a facility-wide risk assessment to potential odor releases under normal and abnormal operating conditions.
4. Developing Odor Control Alternatives. This step involves developing options to reduce offsite odor impacts. These alternatives can include a range of options that can be implemented both in the sewer and the WRF, as well as plant integrated odor control techniques and “end-of-pipe” gas phase odor control equipment to meet the odor reduction goals agreed upon by all stakeholders.
5. Developing the Odor Control Master Plan. This step involves documenting the project and developing conclusions, recommendations, and an implementation plan for control and/or assessment measures. The odor control improvements are prioritized and incorporated into a capital improvement program (CIP) containing immediate, short-term, and long-term solutions. It is a plan that can be communicated with quantifiable goals that allows activities to occur with stakeholder support and their complete understanding.
6. Implementing Public Outreach. This program ideally involves community stakeholders in all aspects of project planning and decision making. What level of involvement or influence is up to each owner and their needs associated with this effort. Many owners want their community to be educated, and not only to dispel

negative perceptions and ungrounded fears. That level of community involvement can range from providing understanding of the Master Plan efforts to having the community making the funding decisions on what should be implemented in the Master Plan.

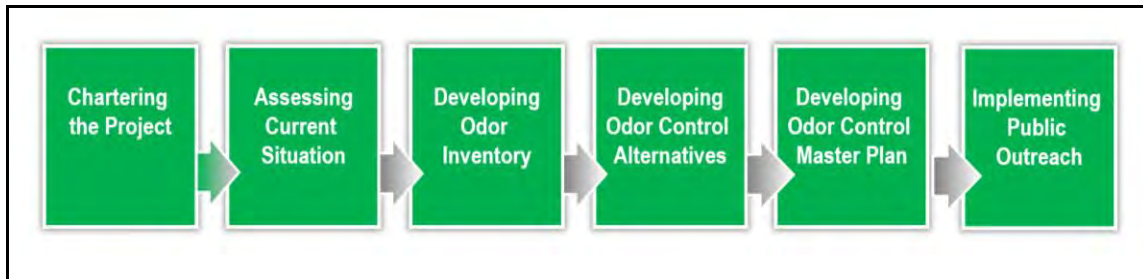


Figure 1: Odor Control Master Planning phases.

DISCUSSION AND EXAMPLES

The following sections present several examples that address how to successfully implement an Odor Control Master Plan.

Chartering the Project

Chartering develops collaboration and decision-making, and results in agreement on approach. Many jurisdictions have applicable regulations, policies, or guidelines aimed at protecting from nuisance odors and/or adverse odor impacts. Odor emissions, if not managed effectively, can manifest as complaints that result in poor public relations and regulatory consequences and fines.

Support of stakeholders is important and as well as their understanding of what factors contribute to odor nuisance. The factors that contribute to odors leading to an odor nuisance complaint are **F**requency, **I**ntensity, **D**uration, **O**ffensiveness and **L**ocation (FIDOL, see **Table 1**, which can be used to characterize the level and risk of odor nuisance [1].

Because of local meteorological conditions at any site, it is not possible to control any of these factors once odors are released into the atmosphere. It is possible to control Frequency, Intensity, and Duration indirectly by releasing odors of such low concentration that once they are transported from the site they do not result in odor complaints. For this reason, regulators often focus on these three parameters (also called dose response criteria) when defining odor compliance limits based on predictive atmospheric dispersion modeling tools. While Frequency, Intensity and Duration can be easily measured, the Offensiveness as perceived by a person is very difficult to measure or predict. It is more difficult to influence the offense that a person takes to the presence of odors, because they are subjective and sometimes based on negative perceptions or perceived health risks.

Table 1: Odor nuisance characterizing parameters.

Odor Nuisance Parameter	Explanation
Frequency	How often an odor is experienced?
Intensity	How strong odor is above background odors? /what is the concentration (Dilution to Threshold or Odor Units) or the Odor Intensity?
Duration	How long the odor is experienced at nuisance levels or is it always there?
Offensiveness	Hedonic Tone. How offensive the odor is to the person detecting it? (i.e. a wastewater treatment operator may respond differently than a school teacher)
Location or context	Where or under what context the odor is experienced and when? (e.g. at what time during the day or night or are there other factors such as loud noise that may affect the threshold level for nuisance).
others	Sometimes it is the knowledge of an activity generating the odor that causes an offensive reaction in people smelling the odor. In addition, people can get desensitized to background odors and become less aware of similar odors.

Through the employment of effective public outreach tools, it is possible to establish a relationship with the community and develop a forum to discuss their concerns, demystify the WRF operations, and build trust. Effective methods of establishing a positive relationship are:

- Training staff to communicate policies effectively
- Use established odor compliant procedures
- Newsletters and Webpages
- Open house tours and public meetings
- Smartphone apps to record and communicate the presence of odors
- Support citizen advisory functions
- Odor surveys and logs

These tools not only help to communicate facts to the public, but they also provide a forum for the community to offer reliable feedback that can be used to fine tune odor control projects and operating procedures. When supplied with good information from sources they trust, the community is more likely to endorse and support mutually beneficial efforts. For example, it is possible to show that concentrations of odorous compounds are often so small that there is no potential for adverse health effects or that uncovered process units not necessarily results in offensive odors. By building trust, communicating odor control strategies, and overcoming misconceptions, it is possible to get quality community

endorsement and a reduction in odor complaints without relying solely on conventional odor control treatment methods.

Odors emissions from most sources occur irregular and are dependent on process and weather conditions. A lot of time, effort and cost can be expended determining odor impact levels using odor sampling unless the odour impacts are present all the time. Moreover, odor nuisance can result in complaints from the general public at concentrations below 10 dilutions to threshold (D/T) and most regulatory odor impact are set at levels of 1 D/T to 10 D/T. However, laboratory odor panels used to evaluate odor samples cannot accurately determine odor concentrations <10 D/T. Therefore, it is usually necessary to collect odor impact data using direct (field) olfactometric assessments or using dispersion models to calculate predicted odor concentrations. Dispersion modeling is a useful tool in predicting the concentration of dispersed odors from a WRF, however dispersion modeling (normally computer based dispersion modeling) has several limitations:

1. The model is only an approximation of "real life" atmospheric processes, and therefore all results are subject to interpretation and degrees of inaccuracy. Back-up odor predictions with visits, field observations or field olfactometric measurements and inputs from people at the site or impact area are therefore typically used in addition to dispersion modeling.
2. The models are unable to account for the synergistic effects of multiple odor types and sources from the WRF or ambient odors, and therefore the model predictions must again be interpreted.
3. The models are not able to predict how people will react to the odors or predict complaint levels – just probability of an odor complaint based on frequency of exposure or duration of exposure to the odors at potential nuisance odor levels.

The odor impact criteria generally take the form of a predicted odor concentration (e.g. 2 D/T) that must not be exceeded for a specified percentage of the time (e.g. 99.5% of the time) based on a specified model averaging time (e.g. 15 minutes). The exceedance allowances are set to account for the frequency dose response component, to allow for the inexactness of the modeling, and to recognize that there will be some odor impact around facilities.

Given the nature of odor impacts, it is very difficult to measure the strength of odor impacts as they occur. However, for an odor control project to be successful there must be agreement between WRF operators, their surrounding communities, and regulators on how acceptable impact is to be defined. Dispersion modeling predictions are one such method and, as long as the aspects of modeling uncertainty are explained clearly to the communities involved, can be an effective tool for demonstrating potential and predicted actual odor impact reductions over time.

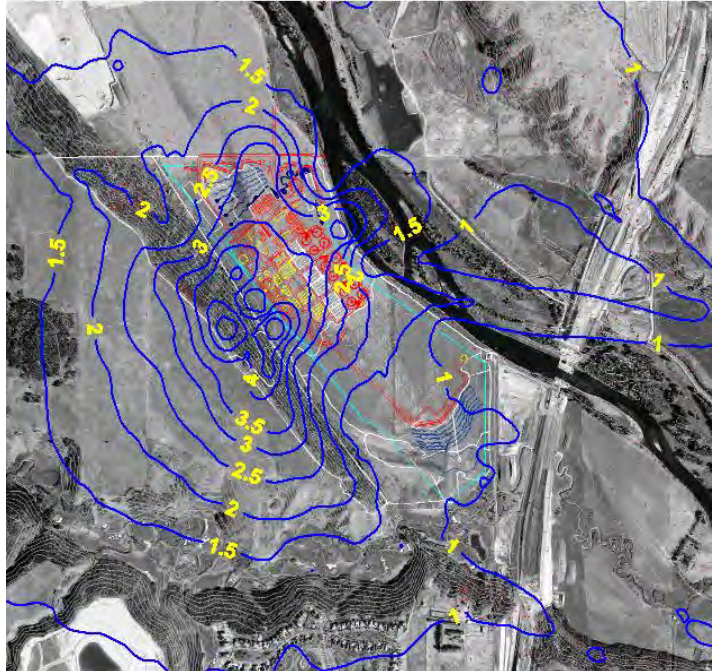


Figure 2: Dispersion modelling example showing the predicted odor concentration “isopleths” around a water recovery facility.

Assessing Current Situation

It is important to identify all the potential critical odor sources, quantify their odor emissions rate and quantify the risk of odor emissions due to unusual operating conditions.

- Identify all the odor sources
- Review operational parameters and dimensions of these sources
- Measure the actual extraction rates from sources, compare them to the design
- Estimate fugitive emissions from all sources
- Develop an emissions sampling plan for quantifying odor emissions
- Identify potential operating upsets resulting in increased odor releases
- Assess any available odor complain data and/or data from community surveys

Assessing odors needs to be undertaken in both qualitative and quantitative areas. Qualitative methods include also those means by which residents provide feedback on odor impact, because a resident may be unable to define the odor impact in terms of odor strength. However, these residents are able, when willingly enlisted, to provide high quality feedback on the timing and nature of odor impacts and the degree of annoyance they feel about the odors. By keeping records of such feedback over time, a WRF operator can monitor changes in impact and relate these to changes and improvements at the WRF.

Site walks with different facility operators is desired for obtaining information about the different odor sources, their history, their relation to the general processes as well as information for the risk analysis for potential operating upsets conditions resulting in increased odor releases.

Developing Odor Inventory

Quantitative assessment of odor emissions and odor impacts involves the use of specific odor sampling protocols and odor analysis methods. Sources typically involve point sources (e.g. stacks), area sources (open tanks) and volume sources (e.g. building or poorly covered process units). The methods for the sampling of odor emissions, particularly for area sources such as open liquid surfaces and aerated area sources such as open biofilters, varies around the world potentially resulting in large differences reported [2, 3]. Well trained personal is required for the execution of the sampling program in close coordination with the facility.

To account for seasonal variations and capture summer peak loads, it is critical that odor sampling is established and commences in summer period and runs through the summer months to get a comprehensive data set of the odor emissions (sources and rates).

Often, time and cost constraints do not allow for extensive odor sampling and analysis programs. Field odor sampling have been shown a very helpful tool to assess odors emissions as increased number of observation on odor emissions can be obtained at different days, different times of the day and under different operating conditions. Field monitoring programs inside and outside the facility have been refined over the years as experience grow with better equipment and optimized protocols. The use of field olfactometers can also be integrated at the facility as an operator tool to assess odor emissions on a regular basis or directly after having received an odor complaint from the community located near the facility.

Similarly, when evaluating process changes or potential future odor management options, it is not possible to effectively determine emissions rates for these changes without trials, which is time consuming and expensive. In such circumstances, collection system and/or WRF fate models can be used to predict emissions for different process locations. CH2M has successfully used:

- Process Sewer Models:

Sewer process modeling is used to predict outgassing locations and hydrogen sulfide concentrations for numerous collection systems. The INTERCEPTOR sewer process model for collection systems assists in assessing reducing odor emissions and/or prolong collection system and WRF headworks life, which is worth millions of dollars.

- Ventilation Models:

Recently improved ventilation models are being used to develop a better understanding of ventilation control strategies. The new ventilation models are being used to provide prediction of air movements that are used for estimating odor emission rates, gas phase hydrogen sulfide concentrations and corrosion rates [4].

- Emission Models:

EPA approved emissions models such as the Bay Area Sewage Total Emissions Model (BASTE). BASTE was originally designed to estimate 19 air emission compounds from wastewater treatment plants wastewater treatment processes and has since been improved to estimate over 400 volatile compounds emitted from any wastewater treatment process [5]

- Fugitive Emission Analysis Tools:

The likelihood for fugitive emissions can be determined using a recently developed method by CH2M called *Odor Capture Performance* where the performance of ventilated cover system can be quantified as function of the local wind conditions [6].



Figure 3: *The performance of ventilated cover systems can now be quantified to determine potential fugitive odor emissions.*

- Risk Analyses Tools:

The odor inventory typically also includes a risk analyses for potential odor emissions during non-standard operations. Typical potential out-of-optimal range process parameters, equipment reliability and upset likelihood are analyzed based on historical events, single-point of failure analysis and discussions with operators all related to potential odor releases.

Developing Odor Control Alternatives

Once the odor impact criteria have been agreed upon by stakeholders and the odor emissions quantified, development and evaluation of odor control management options can be undertaken. This can consist of a series of iterative dispersion modeling assessments, which determine the odor sources that contribute the most to offsite odor impacts and the effects of various odor control measures or interventions. The assessment will prioritize the odor sources.

The next phase in the assessment is to determine the most appropriate control solutions to be used. The evaluation process should not be based solely on cost, preconceived technology, or standard approaches. Ideally, it will identify and account for the different selection parameters and stakeholders, include some weighting to the factors identified to balance competing needs, consider treatment process changes, and should include a net present worth analysis.

To assess odor control management options, several factors need to be considered:

- Benchmarking operational and housekeeping practices
- Impacts of other processes and operation and maintenance (O&M) efforts
- Potential corrosion and life expectancy of assets with and without odor control measures
- The availability of capital and land, climate and operator capabilities
- Reduction in odor
- Community impact

- Net Present Value
- Ease of implementation
- Compatibility with long terms site requirements

Significant low-cost improvements can often be achieved through improved housekeeping and small operational changes. Examples of this include extending odorous return side streams (e.g. centrate or leachate) to below water level, ensuring that covers are kept closed, replacing broken or corroded covers and missing seals, and preventing the buildup of scum and sludge on surfaces through regular hosing. Installation of level control gates to reduce hydraulic drops has been effective for reducing odors from outlet weirs on primary tanks and Dissolved Air Floatation Thickeners (DAFTs) and is less expensive than installing covers and vapor phase treatment equipment. In addition, efficient aeration systems reduce odors as well as saves power consumption. Several facilities have reduced odor levels from aeration tanks by switching from coarse to fine bubble aeration systems and, at the same time, substantially reducing power consumption. The results for a retrofitting project in Australia are illustrated in **Table 2**.

Table 2: Odor Emissions from coarse and fine bubble aeration.

	Concentration (OU)		Flux OU/m ² /min	
	Fine bubble aeration	Coarse bubble aeration	Fine bubble aeration	Coarse bubble aeration
Pass 1	325	3419	46.5	490
Pass 2	392	2563	56.2	367
Pass 3	277	134	39.7	19.2
Pass 4	273	168	35.1	24.1
Average	317	1571	47	292

A large WRF Authority in Pennsylvania could defer the vapor phase control strategy of the aeration tanks, because follow up emissions sampling and dispersion modeling after retrofitting with fine bubble aeration systems indicated no offsite impacts.

When evaluating vapor phase control technologies, supplier's claims and performance should be treated with caution and an independent analysis with allowances made for performance variables and equipment deterioration. Odor treatment system performance can deteriorate over time and chemical consumption can be higher than claimed by suppliers. Also, more often is considered the use of biotechnology, which have been successfully used over recent years as a more cost-effective alternative to wet chemical scrubbers and have performed much better than previous, but only when designed and operated properly.

The prevention of odorant formation is a more desirable approach to odor control before odorants being released to the atmosphere as that eliminates requiring end-of-the-pipe technologies. Activated Sludge Recycling (ASR) and Oxidized Ammonium Recycling (OAR) are both technologies that present high application potential using readily available

plant by-products with a minimum plant upgrading, and relatively low investment and operating costs, contributing to the sustainability and economic efficiency of odor control at wastewater treatment facilities [7]. The results of a trial project in Canada are illustrated in **Figure 4**.

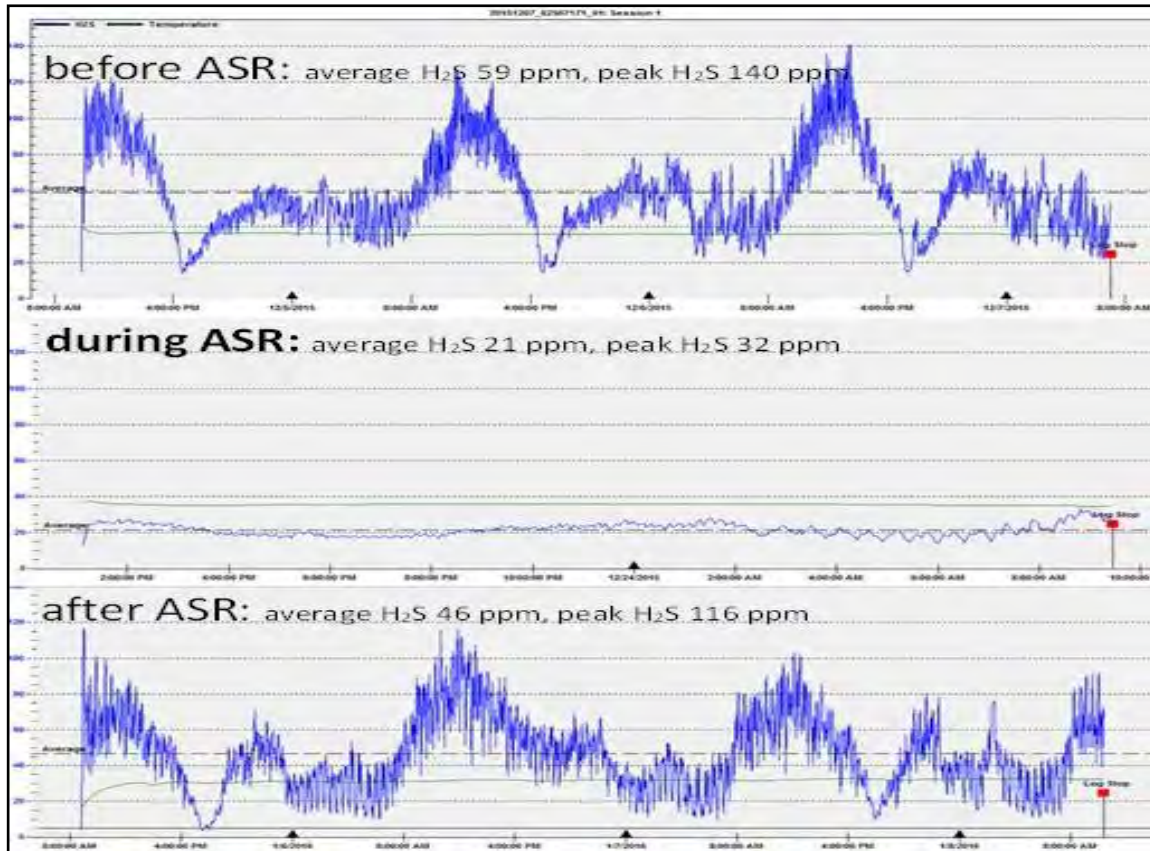


Figure 4: Impact of activated sludge recycling (ASR) on the headspace hydrogen sulfide concentration in the facility inlet channel.

The odor control options analyses should include the evaluation of process changes, process optimizations or replacement of existing process units. Increasing the frequency of emptying and cleaning out settled solids in channels of process units like PSTs or pump stations should be considered and evaluated. It is important to appreciate the interdependence between odor emission rates and operational parameters (and process selection) as part of this exercise.

A structured evaluation to reducing odor is developed for biosolids processes in the Biosolids Odor Reduction Roadmap (BORR) as outlined by WERF [8]. For example, work by CH2M showed that better volatile solids destruction can be achieved with increased digester sludge retention time (SRT). Increasing the digester SRT can be achieved by increasing the digester solids feed concentration, effectively thickening the sludge to a higher concentration. For each 0.5% increase in solids concentration about 8% reduction in total volatile organic sulphur compounds (Total peak S less H₂S-S) from the biosolids can be achieved, reducing the odor from the sludge significantly as shown in **Figure 5**.

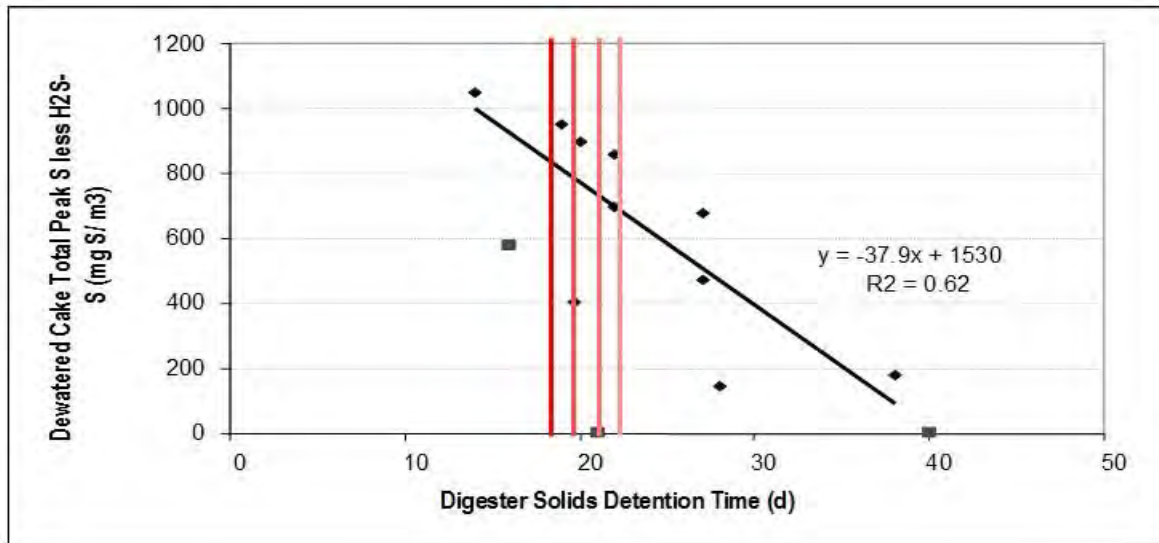


Figure 5: Longer sludge retention time in digesters, due to increased feed solids concentration, resulting in reduced formation of odorous volatile organic sulphur compounds.

Controlling the odors from biosolids has focused on optimizing the digestion and dewatering processes to minimize this odor production. In addition, a method of biologically seeding dewatered biosolids has been developed by CH2M called BORS that significantly reduces the odor emissions by blending aged biosolid cake with fresh cake as it is produced [9]. This will effectively seed the fresh cake with odor reducing microorganisms thereby reducing odor concentrations in the cake much more rapidly than if the cake can age on its own. The results of trials showed that the concentration of different volatile sulfur compound decreased by 50% to 85% depending on the compound as illustrated in **Figure 6**.

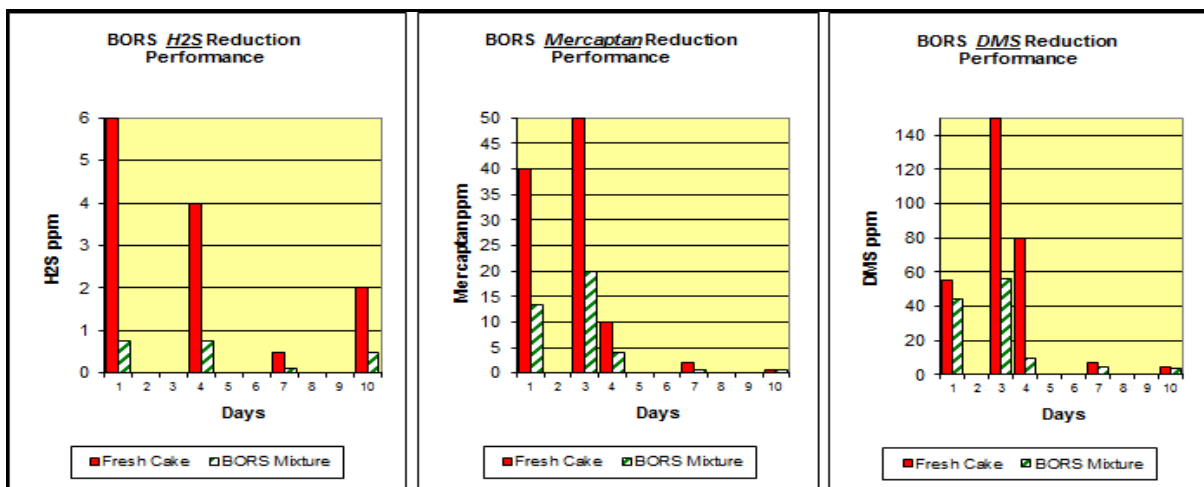


Figure 6: BORS process odorous compound reduction performance results.

Other examples of integrated approaches to reducing odors are the recycling of less odorous air into areas with more concentrated odors while increasing ventilation rates could be explored. Also, potentially the use of buildings and trees to improve dispersion or to reduce visual impact can be in certain situations a cost-effective measure that could be considered.

Developing the Odor Control Master Plan

The next step is to document the first steps and develop conclusions, recommendations, and an implementation plan for the facilities involved. Based on the results of the data compilation, analyses and modeling, the recommended operational changes and odor controls should be prioritized in descending order of estimated effectiveness. The prioritized list should then be used to establish an implementation plan, with agreement from all stakeholders. Stakeholder workshops will be held to get to an agreed strategy outlining:

- Critical Works: What needs to be done in the short term to reduce the plants odor contour.
- Important but not Critical Works: Works that will provide important benefits such as; much lower odor impacts; easier impacts assessment; ease of operation, lower odor treatment costs etc.
- Future Works: These will include things that may have to be done in the future, but require further planning or certain triggers before they are implemented.

The “Critical works” and “Important but not Critical Works” will then be developed to a schematic level design and costings further refined to a level that can be used for a business case submission that achieve the best, immediate, short-term, and long-term solutions.

All of the above will then be incorporated into an Odour Master Plan showing the proposed step-wise implementation strategy, required performance and odor contour for each implementation step and the decision-making process used. The Master Plan will also provide a longer-term strategy for managing odor impacts in a proactive way, which can be readily communicated to the community.

Implementing Public Outreach

WRFs can be large or small facilities located near or in view of residential areas. In many cases, residents are unaware of the activities occurring within the WRF, and may be suspicious if their first introduction to the plant is a foul odor. Residents often associate the presence of odors with potential human health impacts. These suspicions and concerns can often lead to complaints. Residents who have complained in the past, but have had little or no response from the WRF operator, may be more concerned than would be the case had they been treated better.

Community outreach programs can take various forms including having a structured and active complaint response process in place involving residents in odor impact surveys providing tours and information about the WRF to residents and other interested parties, and involving representatives of odor impacted communities in the decision-making process.

An example of where complaints have decreased purely because of an outreach program is at a WRF in the USA. **Figure 7** present the historical odor complaints. Complaint levels dropped dramatically once the community outreach program commenced. This was prior to the implementation of any actual odor reduction activities, demonstrating that community

involvement can partially mitigate odor complaints. Public education and outreach also helps to dispel negative perceptions and ungrounded fears in regards to sewage odors and health

€

Odor Complaints Received by Year (1993-2003)
(2003 through 5/9)

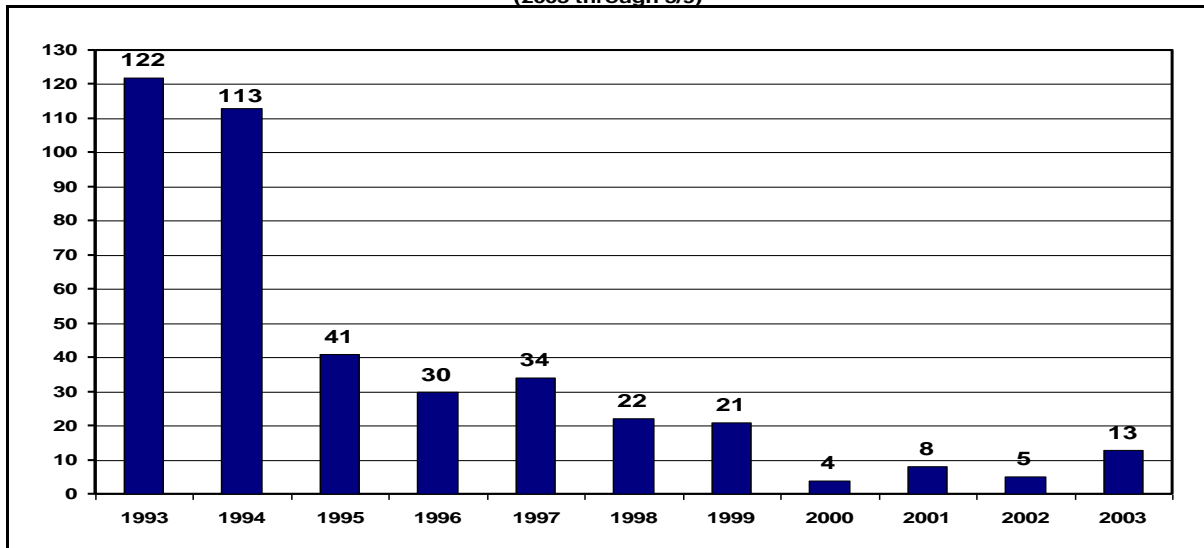


Figure 6: Odor complaints received by year (1993-2003) before and after the implementation of a Community Outreach Program in 1995.

However, community outreach is not an odor reduction tool that can be conducted in isolation. It must be combined with a commitment to a capital improvement program to reduce odor levels. A properly implemented community outreach and education program can provide reasonable timeframes for implementation of odor reduction measures. However, community outreach can turn to community outrage if the agreed odor reduction activities do not occur within the timeframe or do not occur at all.

CONCLUSIONS

Although the cost for odor control for the collection and treatment of municipal and industrial wastewaters has increased over recent decades, odor assessment tools have been developed and/or dramatically improved over the last decade.

All these tools are now available to be used for Odor Control Master Planning as well as to be used for communication means such as public outreach, community meetings and obtaining internal and external stakeholder support. The discussed Tool Set draws together the aspects of chartering the odor control effort, assessing the current situation, developing detailed alternatives to control odor, and developing the Odor Control Master Plan.

The Odor Control Master Planning Tool Set developed by CH2M is successfully used over the years to evaluate the issues and obtain endorsement from all stakeholders for a mutually acceptable path forward. Proper evaluation and prioritization of control solutions has helped focus attention to areas that achieve the best, immediate, short-term, and long-term solutions.

References

- [1] Dalton, P. (2002) Olfaction, in S. Yamtis and H. Pashler (eds), *Stevens' Handbook of Experimental Psychology, Vol 1, Sensation and Perception*, 3rd edn. John Wiley and Sons. Inc., New York :691-746.
- [2] Cesca, J.; Freeman, T.; Mann, J.; *Odors Ain't Odors. When Is An Odors Offensive?* (2003) Proceedings of the Clean Air Society of Australia and New Zealand National Clean Air Conference: Linking Air Pollution Science, Policy and Management.
- [3] Witherspoon, J, Allen, E and Chris Quigley (2002) *Modeling to Assist in Wastewater Collection System Odors and Corrosion Potential Evaluations*. International water Association Conference Singapore.
- [4] Ward, M., Hamer, G., McDonald, A., Witherspoon, J., Loh, E., Parker, W. (2011) A Sewer Ventilation Model Applying Conservation of Momentum. *Water Science & Technology*. 64.6: 1374-1382.
- [5] Kepke, J., Schroeter, J., Witherspoon, J., Dinsmore, C. (2003) *The New and Improved BASTE Model for Estimating Odors and VOC Emissions*. Proceedings of the Water Environment Federation, WEFTEC 2003. <https://doi.org/10.2175/193864703784756011>.
- [6] Kraakman, N.J.R, Estrada, J. M., Cowden, S., Cesca, J., Lebrero, R., Muñoz, R. (2016) *Preventing Odor Emissions by Integrated Activated Sludge and Oxidized Ammonium Recycling*. WEFTEC. October 2017. New Orleans, USA.
- [7] Kraakman, N.J.R., Cesca, J., Hamer, G., Witherspoon, J. (2016) *Design and Implementation of Air Extraction using the Odor Capture Performance for the Containment of Odors*. WEF specialty conference. March 2016. Milwaukee, USA.
- [8] WERF (2008) *Biosolids Processing Modifications For Cake Odor Reduction*. IWAP ISBN: 1-84339-790-0. <http://borr.werf.org/>.
- [9] US patent 7,537,699 B2 and 8,119,003 B1.